

Contact name:

Email:

Company:


Date:

Tel:

Fax:

Note: The Pin Return (PR) Units are discrete I/O devices used exclusively to detect the Pin Return position.

1. Pin Return (PR) Unit Configuration * :

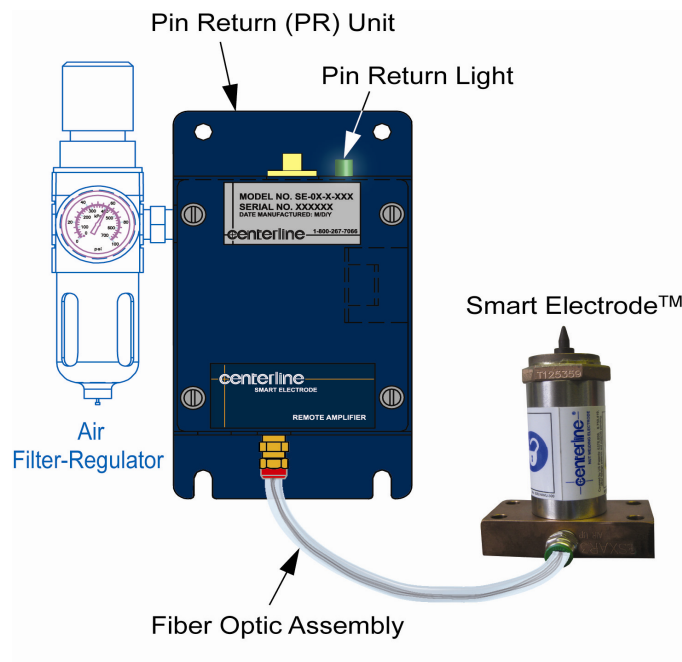

* Shown for illustration purposes only. Customer unit can vary according to application.

2. Components:

2.1. Filter-Regulator required: Yes No (Customer Supplied)

2.2. Smart Electrode™ body configuration: Please complete the *Weld Nut Application with Smart Electrode™ Sheet* or *Weld Stud Application with Smart Electrode™ Sheet*.

3. Comments: