
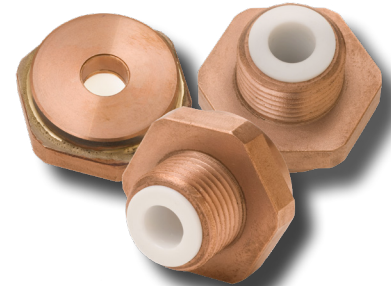


Same great quality, at a lower price.

Electrode misalignment can cause pin deflection and arcing.


Heads require the use of air to prevent pin sticking.

Heads require water cooling.

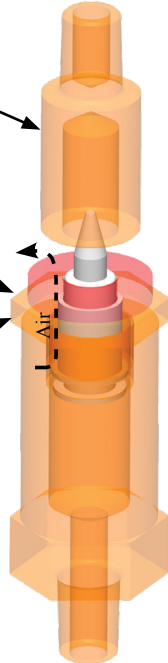

PH Style Weld Head


Spot face on Class 11 prevents premature pin sticking from burrs on stamping.

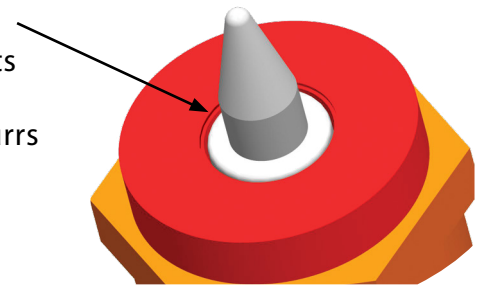

### GH & PH Style Compatible Part Numbers

Series 2		Series 3		Series 4	
GH Number	PH Number	GH Number	PH Number	GH Number	PH Number
<b>Max. XXX = .427</b>	<b>Max. XXX = .377</b>	<b>Max. XXX = .642</b>	<b>Max. XXX = .638</b>	<b>Max. XXX = .852</b>	<b>Max. XXX = .825</b>
GH2050T062XXX	PH2050T062XXX	GH3050T087XXX	PH3050T087XXX	GH4062T100XXX	PH4062T100XXX
GH2050T075XXX	PH2050T075XXX	GH3050T100XXX	PH3050T100XXX	GH4062T125XXX	PH4062T125XXX
GH2050T087XXX	PH2050T087XXX	GH3050T125XXX	PH3050T125XXX	GH4062T150XXX	PH4062T150XXX
GH2050T100XXX	PH2050T100XXX				

**XXX** represents the maximum allowable Hole in Head Diameter.

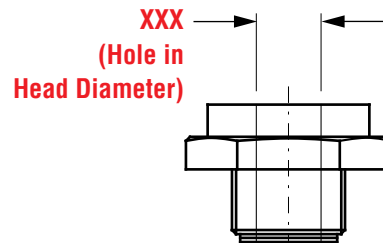

### CENTERED ON SOLUTIONS

#### HEAD OFFICE:

CenterLine (Windsor) Ltd.  
415 Morton Drive  
Windsor, Ontario, Canada  
N9J 3T8

Head Office  
Sales  
Service

**TELEPHONE TOLL-FREE**  
519-734-8464 800-820-6977  
519-734-6560 800-771-6172  
519-734-0080 800-268-8184

#### EMAIL

info@cntrline.com  
sales@cntrline.com  
service@cntrline.com